# **SiT1618B**

# Standard Frequency, High Temperature Oscillator



#### **Features**

- 33 standard frequencies between 7.3728 MHz and 48 MHz
- Supply voltage of 1.8 V or 2.5 V to 3.3 V continuous
- Operating temperature from -40°C to 125°C.
   For -55°C option, refer to SiT8920 and SiT8921
- Excellent total frequency stability as low as ±20 ppm
- Low power consumption of 3.5 mA typical at 1.8 V
- LVCMOS/LVTTL compatible output
- Industry-standard packages: 2.0 x 1.6, 2.5 x 2.0, 3.2 x 2.5, 5.0 x 3.2, 7.0 x 5.0 mm x mm
- Instant samples with Time Machine II and Field Programmable oscillators
- RoHS and REACH compliant, Pb-free, Halogen-free and Antimony-free
- For AEC-Q100 oscillators, refer to SiT8924 and SiT8925

# **Applications**

- Industrial, medical, automotive, avionics and other high temperature applications
- Industrial sensors, PLC, motor servo, outdoor networking equipment, medical video cam, asset tracking systems, etc.







SOLUTIONS



# **Electrical Specifications**

#### **Table 1. Electrical Characteristics**

All Min and Max limits are specified over temperature and rated operating voltage with 15 pF output load unless otherwise stated. Typical values are at 25°C and nominal supply voltage.

stated. Typical values are a	t 25 C an	a nomina	ıı suppıy v	onage.		
Parameters	Symbol	Min.	Тур.	Max.	Unit	Condition
				Frequency F	Range	
Output Frequency Range	f	33 standar 7.372	rd frequencie 8 MHz and 4	es between 8 MHz	MHz	Refer to Table 13 for the exact list of supported frequencies
			Freque	ency Stabilit	y and Agin	ng
Frequency Stability	F_stab	-20	-	+20	ppm	Inclusive of Initial tolerance at 25°C, 1st year aging at 25°C,
		-25	_	+25	ppm	and variations over operating temperature, rated power supply voltage and load.
		-30	_	+30	ppm	Tated power supply voltage and load.
		-50	_	+50	ppm	
			Opera	ting Temper	ature Rang	ge
Operating Temperature Range	T_use	-40	_	+105	ô	Extended Industrial
(ambient)		-40	_	+125	ů	Automotive
		,	Supply Volta	age and Cur	rent Consu	umption
Supply Voltage	Vdd	1.62	1.8	1.98	V	
		2.25	2.5	2.75	V	
		2.52	2.8	3.08	V	
		2.7	3.0	3.3	V	
		2.97	3.3	3.63	V	
		2.25	_	3.63	V	
Current Consumption	ldd	-	3.8	4.7	mA	No load condition, f = 20 MHz, Vdd = 2.8 V or 3.3 V
		-	3.6	4.5	mA	No load condition, f = 20 MHz, Vdd = 2.5 V
		-	3.5	4.5	mA	No load condition, f = 20 MHz, Vdd = 1.8 V
OE Disable Current	I_OD	-	_	4.5	mA	Vdd = 2.5 V to 3.3 V, OE = Low, Output in high-Z state
		-	_	4.3	mA	Vdd = 1.8 V. OE = Low, Output in high-Z state
Standby Current	I_std	-	2.6	8.5	μА	Vdd = 2.8 V to 3.3 V, ST = Low, Output is weakly pulled down
		-	1.4	5.5	μА	Vdd = 2.5 V, ST = Low, Output is weakly pulled down
		-	0.6	4.0	μА	Vdd = 1.8 V, ST = Low, Output is weakly pulled down



**Table 1. Electrical Characteristics (continued)** 

Parameters	Symbol	Min.	Тур.	Max.	Unit	Condition
			LVCM	OS Output	Characteris	stics
Duty Cycle	DC	45	_	55	%	All Vdds
Rise/Fall Time	Tr, Tf	-	1.0	2.0	ns	Vdd = 2.5 V, 2.8 V, 3.0 V or 3.3 V, 20% - 80%
		-	1.3	2.5	ns	Vdd = 1.8 V, 20% - 80%
		-	1.0	3	ns	Vdd = 2.25 V - 3.63 V, 20% - 80%
Output High Voltage	VOH	90%	_	_	Vdd	IOH = -4 mA (Vdd = 3.0 V or 3.3 V) IOH = -3 mA (Vdd = 2.8 V or Vdd = 2.5 V) IOH = -2 mA (Vdd = 1.8 V)
Output Low Voltage	VOL	-	_	10%	Vdd	IOL = 4 mA (Vdd = 3.0 V or 3.3 V) IOL = 3 mA (Vdd = 2.8 V or 2.5 V) IOL = 2 mA (Vdd = 1.8 V)
			- 1	nput Chara	cteristics	
Input High Voltage	VIH	70%	-	-	Vdd	Pin 1, OE or ST
Input Low Voltage	VIL	-	-	30%	Vdd	Pin 1, OE or ST
Input Pull-up Impedance	Z_in	50	87	150	kΩ	Pin 1, OE logic high or logic low, or ST logic high
		2	_	_	MΩ	Pin 1, ST logic low
			Star	tup and Re	sume Timir	ng
Startup Time	T_start	-	_	5	ms	Measured from the time Vdd reaches its rated minimum value
Enable/Disable Time	T_oe	-	-	162	ns	f = 48 MHz. For other frequencies, T_oe = 100 ns + 3 * clock periods
Resume Time	T_resume	_	_	5	ms	Measured from the time ST pin crosses 50% threshold
				Jitte	er	
RMS Period Jitter	T_jitt	-	1.6	2.5	ps	f = 20 MHz, Vdd = 2.5 V, 2.8 V, 3.0 V or 3.3 V
		-	1.9	4	ps	f = 20 MHz, Vdd = 1.8 V
Peak-to-peak Period Jitter	T_pk	-	12	20	ps	f = 20 MHz, Vdd = 2.5 V, 2.8 V, 3.0 V or 3.3 V
		_	14	30	ps	f = 20 MHz, Vdd = 1.8 V
RMS Phase Jitter (random)	T_phj	_	0.5	0.8	ps	f = 40 MHz, Integration bandwidth = 900 kHz to 7.5 MHz
		_	1.3	2	ps	f = 40 MHz, Integration bandwidth = 12 kHz to 20 MHz

#### **Table 2. Pin Description**

Pin	Symbol		Functionality
		Output Enable	H <sup>[1]</sup> : specified frequency output L: output is high impedance. Only output driver is disabled.
1	OE/ST/NC	Standby	H <sup>[1]</sup> : specified frequency output L: output is low (weak pull down). Device goes to sleep mode. Supply current reduces to I_std.
	No Connect		Any voltage between 0 and Vdd or Open <sup>[1]</sup> : Specified frequency output. Pin 1 has no function.
2	GND	Power	Electrical ground
3	OUT	Output	Oscillator output
4	VDD	Power	Power supply voltage <sup>[2]</sup>




Figure 1. Pin Assignments

#### Notes:

- 1. In OE or  $\overline{ST}$  mode, a pull-up resistor of 10 k $\Omega$  or less is recommended if pin 1 is not externally driven. If pin 1 needs to be left floating, use the NC option.
- 2. A capacitor of value 0.1  $\mu F$  or higher between Vdd and GND is required.



#### **Table 3. Absolute Maximum Limits**

Attempted operation outside the absolute maximum ratings may cause permanent damage to the part.

Actual performance of the IC is only guaranteed within the operational specifications, not at absolute maximum ratings.

Parameter	Min.	Max.	Unit
Storage Temperature	-65	150	°C
Vdd	-0.5	4	V
Electrostatic Discharge	-	2000	V
Soldering Temperature (follow standard Pb free soldering guidelines)	-	260	°C
Junction Temperature <sup>[3]</sup>	-	150	°C

#### Note:

### Table 4. Thermal Consideration<sup>[4]</sup>

Package	θJA, 4 Layer Board (°C/W)	θJA, 2 Layer Board (°C/W)	θJC, Bottom (°C/W)
7050	142	273	30
5032	97	199	24
3225	109	212	27
2520	117	222	26
2016	152	252	36

#### Note:

### Table 5. Maximum Operating Junction Temperature<sup>[5]</sup>

Max Operating Temperature(ambient)	Maximum Operating Junction Temperature
105°C	115°C
125°C	135°C

#### Note:

#### **Table 6. Environmental Compliance**

Parameter	Condition/Test Method		
Mechanical Shock	MIL-STD-883F, Method 2002		
Mechanical Vibration	MIL-STD-883F, Method 2007		
Temperature Cycle	JESD22, Method A104		
Solderability	MIL-STD-883F, Method 2003		
Moisture Sensitivity Level	MSL1 @ 260°C		

Exceeding this temperature for extended period of time may damage the device.

Refer to JESD51 for θJA and θJC definitions, and reference layout used to determine the θJA and θJC values in the above table.

<sup>5.</sup> Datasheet specifications are not guaranteed if junction temperature exceeds the maximum operating junction temperature.



# Test Circuit and Waveform[6]

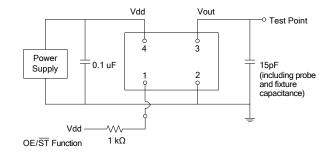


Figure 2. Test Circuit

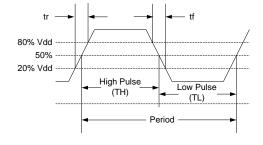


Figure 3. Waveform

#### Note:

6. Duty Cycle is computed as Duty Cycle = TH/Period.

## **Timing Diagrams**


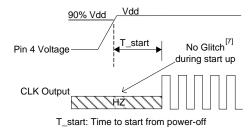


Figure 4. Startup Timing (OE/ST Mode)



T\_resume: Time to resume from ST

Vdd

50% Vdd

OE Voltage

T\_oe

CLK Output

HZ

T\_oe: Time to re-enable the clock output

Figure 5. Standby Resume Timing (ST Mode Only)




Figure 7. OE Disable Timing (OE Mode Only)

## Figure 6. OE Enable Timing (OE Mode Only)

#### Note:

7. SiT1618 has "no runt" pulses and "no glitch" output during startup or resume.



### Performance Plots[8]

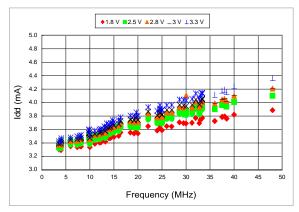


Figure 8. Idd vs Frequency

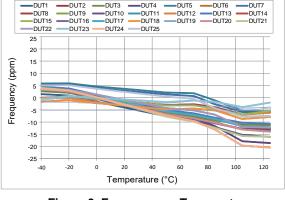


Figure 9. Frequency vs Temperature

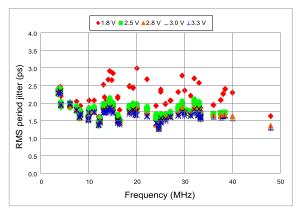


Figure 10. RMS Period Jitter vs Frequency

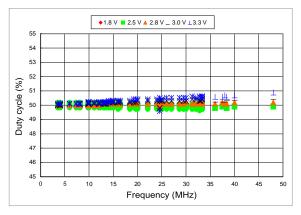


Figure 11. Duty Cycle vs Frequency

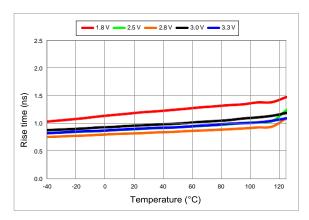


Figure 12. 20%-80% Rise Time vs Temperature


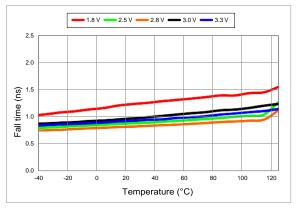


Figure 13. 20%-80% Fall Time vsTemperature

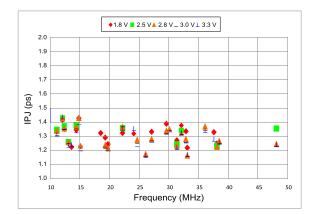

# Performance Plots<sup>[8]</sup> (continued)



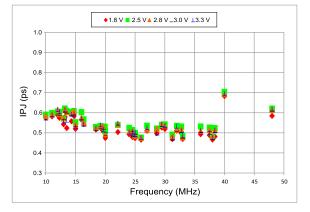


Figure 14. RMS Integrated Phase Jitter Random (12 kHz to 20 MHz) vs Frequency[9]

Figure 15. RMS Integrated Phase Jitter Random (900 kHz to 20 MHz) vs Frequency<sup>[9]</sup>

- All plots are measured with 15 pF load at room temperature, unless otherwise stated.
   Phase noise plots are measured with Agilent E5052B signal source analyzer. Integration range is up to 5 MHz for carrier frequencies below 40 MHz.



### **Programmable Drive Strength**

The SiT1618 includes a programmable drive strength feature to provide a simple, flexible tool to optimize the clock rise/fall time for specific applications. Benefits from the programmable drive strength feature are:

- Improves system radiated electromagnetic interference (EMI) by slowing down the clock rise/fall time.
- Improves the downstream clock receiver's (RX) jitter by decreasing (speeding up) the clock rise/fall time.
- Ability to drive large capacitive loads while maintaining full swing with sharp edge rates.

For more detailed information about rise/fall time control and drive strength selection, see the SiTime Application Notes section.

#### **EMI Reduction by Slowing Rise/Fall Time**

Figure 16 shows the harmonic power reduction as the rise/fall times are increased (slowed down). The rise/fall times are expressed as a ratio of the clock period. For the ratio of 0.05, the signal is very close to a square wave. For the ratio of 0.45, the rise/fall times are very close to near-triangular waveform. These results, for example, show that the 11<sup>th</sup> clock harmonic can be reduced by 35 dB if the rise/fall edge is increased from 5% of the period to 45% of the period.

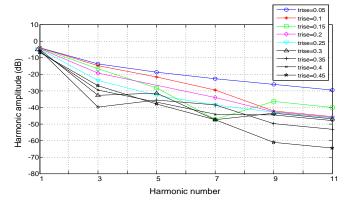


Figure 16. Harmonic EMI reduction as a Function of Slower Rise/Fall Time

#### Jitter Reduction with Faster Rise/Fall Time

Power supply noise can be a source of jitter for the downstream chipset. One way to reduce this jitter is to speed up the rise/fall time of the input clock. Some chipsets may also require faster rise/fall time in order to reduce their sensitivity to this type of jitter. Refer to the Rise/Fall Time Tables (Table 7 to Table 11) to determine the proper drive strength.

#### **High Output Load Capability**

The rise/fall time of the input clock varies as a function of the actual capacitive load the clock drives. At any given drive strength, the rise/fall time becomes slower as the output load increases. As an example, for a 3.3 V SiT1618 device with default drive strength setting, the typical rise/fall time is 1ns for 15 pF output load. The typical rise/fall time slows down to 2.6 ns when the output load increases to 45 pF. One can choose to speed up the rise/fall time to 1.83 ns by then increasing the drive strength setting on the SiT1618.

The SiT1618 can support up to 60 pF or higher in maximum capacitive loads with drive strength settings. Refer to the Rise/Tall Time Tables (Table 7 to 11) to determine the proper drive strength for the desired combination of output load vs. rise/fall time.

#### SiT1618 Drive Strength Selection

Tables 7 through 11 define the rise/fall time for a given capacitive load and supply voltage.

- Select the table that matches the SiT1618 nominal supply voltage (1.8 V, 2.5 V, 2.8 V, 3.0 V, 3.3 V).
- 2. Select the capacitive load column that matches the application requirement (5 pF to 60 pF)
- 3. Under the capacitive load column, select the desired rise/fall times.
- 4. The left-most column represents the part number code for the corresponding drive strength.
- Add the drive strength code to the part number for ordering purposes.

#### **Calculating Maximum Frequency**

Based on the rise and fall time data given in Tables 7 through 11, the maximum frequency the oscillator can operate with guaranteed full swing of the output voltage over temperature can be calculated:

Max Frequency = 
$$\frac{1}{5 \text{ x Trf}\_20/80}$$

where Trf\_20/80 is the typical value for 20%-80% rise/fall time.

#### **Example 1**

Calculate f<sub>MAX</sub> for the following condition:

- Vdd = 1.8 V (Table 7)
- Capacitive Load: 30 pF
- Desired Tr/f time = 3 ns (rise/fall time part number code = E)

 $f_{\text{MAX}} = 48.000000$  where 48 MHz is highest available frequency for this device.

Part number for the above example:

SiT1618BI**E**12-18E-48.000000



Drive strength code is inserted here. Default setting is "-"



# Rise/Fall Time (20% to 80%) vs $C_{\text{LOAD}}$ Tables

Table 7. Vdd = 1.8 V Rise/Fall Times for Specific C<sub>LOAD</sub>

Rise/Fall Time Typ (ns)							
Drive Strength \ C <sub>LOAD</sub>	5 pF	15 pF	30 pF	45 pF	60 pF		
L	6.16	11.61	22.00	31.27	39.91		
Α	3.19	6.35	11.00	16.01	21.52		
R	2.11	4.31	7.65	10.77	14.47		
В	1.65	3.23	5.79	8.18	11.08		
T	0.93	1.91	3.32	4.66	6.48		
E	0.78	1.66	2.94	4.09	5.74		
U	0.70	1.48	2.64	3.68	5.09		
F or "-": default	0.65	1.30	2.40	3.35	4.56		

Table 9. Vdd = 2.8 V Rise/Fall Times for Specific  $C_{\text{LOAD}}$ 

Rise/Fall Time Typ (ns)							
Drive Strength \ C <sub>LOAD</sub>	5 pF	15 pF	30 pF	45 pF	60 pF		
L	3.77	7.54	12.28	19.57	25.27		
Α	1.94	3.90	7.03	10.24	13.34		
R	1.29	2.57	4.72	7.01	9.06		
В	0.97	2.00	3.54	5.43	6.93		
Т	0.55	1.12	2.08	3.22	4.08		
E or "-": default	0.44	1.00	1.83	2.82	3.67		
U	0.34	0.88	1.64	2.52	3.30		
F	0.29	0.81	1.48	2.29	2.99		

Table 11. Vdd = 3.3 V Rise/Fall Times for Specific  $C_{\text{LOAD}}$ 

Rise/Fall Time Typ (ns)							
Drive Strength \ C <sub>LOAD</sub>	5 pF	15 pF	30 pF	45 pF	60 pF		
L	3.39	6.88	11.63	17.56	23.59		
Α	1.74	3.50	6.38	8.98	12.19		
R	1.16	2.33	4.29	6.04	8.34		
В	0.81	1.82	3.22	4.52	6.33		
T or "-": default	0.46	1.00	1.86	2.60	3.84		
E	0.33	0.87	1.64	2.30	3.35		
U	0.28	0.79	1.46	2.05	2.93		
F	0.25	0.72	1.31	1.83	2.61		

Table 8. Vdd = 2.5 V Rise/Fall Times for Specific  $C_{\text{LOAD}}$ 

Rise/Fall Time Typ (ns)							
Drive Strength \ C <sub>LOAD</sub>	5 pF	15 pF	30 pF	45 pF	60 pF		
L	4.13	8.25	12.82	21.45	27.79		
Α	2.11	4.27	7.64	11.20	14.49		
R	1.45	2.81	5.16	7.65	9.88		
В	1.09	2.20	3.88	5.86	7.57		
Т	0.62	1.28	2.27	3.51	4.45		
E or "-": default	0.54	1.00	2.01	3.10	4.01		
U	0.43	0.96	1.81	2.79	3.65		
F	0.34	0.88	1.64	2.54	3.32		

Table 10. Vdd = 3.0 V Rise/Fall Times for Specific  $C_{\text{LOAD}}$ 

Rise/Fall Time Typ (ns)							
Drive Strength \ C <sub>LOAD</sub>	5 pF	15 pF	30 pF	45 pF	60 pF		
L	3.60	7.21	11.97	18.74	24.30		
Α	1.84	3.71	6.72	9.86	12.68		
R	1.22	2.46	4.54	6.76	8.62		
В	0.89	1.92	3.39	5.20	6.64		
T or "-": default	0.51	1.00	1.97	3.07	3.90		
E	0.38	0.92	1.72	2.71	3.51		
U	0.30	0.83	1.55	2.40	3.13		
F	0.27	0.76	1.39	2.16	2.85		



# Pin 1 Configuration Options (OE, ST, or NC)

Pin 1 of the SiT1618 can be factory-programmed to support three modes: Output Enable (OE), standby (ST) or No Connect (NC). These modes can also be programmed with the Time Machine using field programmable devices.

#### **Output Enable (OE) Mode**

In the OE mode, applying logic Low to the OE pin only disables the output driver and puts it in Hi-Z mode. The core of the device continues to operate normally. Power consumption is reduced due to the inactivity of the output. When the OE pin is pulled High, the output is typically enabled in <1  $\mu$ s.

#### Standby (ST) Mode

In the  $\overline{ST}$  mode, a device enters into the standby mode when Pin 1 pulled Low. All internal circuits of the device are turned off. The current is reduced to a standby current, typically in the range of a few  $\mu A$ . When  $\overline{ST}$  is pulled High, the device goes through the "resume" process, which can take up to 5 ms.

#### No Connect (NC) Mode

In the NC mode, the device always operates in its normal mode and outputs the specified frequency regardless of the logic level on pin 1.

Table 12 below summarizes the key relevant parameters in the operation of the device in OE,  $\overline{ST}$ , or NC mode.

Table 12. OE vs. ST vs. NC

	OE	ST	NC
Active current 20 MHz (max, 1.8 V)	4.5 mA	4.5 mA	4.5 mA
OE disable current (max. 1.8 V)	4.3 mA	N/A	N/A
Standby current (typical 1.8 V)	N/A	0.6 uA	N/A
OE enable time at 48 MHz (max)	162 ns	N/A	N/A
Resume time from standby (max, all frequency)	N/A	5 ms	N/A
Output driver in OE disable/standby mode	High Z	weak pull-down	N/A

#### **Output on Startup and Resume**

The SiT1618 comes with gated output. Its clock output is accurate to the rated frequency stability within the first pulse from initial device startup or resume from the standby mode.

In addition, the SiT1618 features "no runt" pulses and "no glitch" output during startup or resume as shown in the waveform captures in Figure 17 and Figure 18.

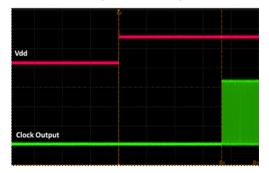


Figure 17. Startup Waveform vs. Vdd

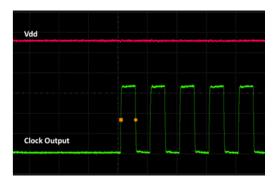


Figure 18. Startup Waveform vs. Vdd (Zoomed-in View of Figure 17)

# Instant Samples with Time Machine and Field Programmable Oscillators

SiTime supports a field programmable version of the SiT1618 standard frequency, high temperature oscillator for fast prototyping and real time customization of features. The Field Programmable devices (FP devices) are available for all five standard SiT1618 package sizes and can be configured to one's exact specification using the Time Machine II, an USB powered MEMS oscillator programmer.

# Customizable Features of the SiT1618 FP Devices Include


- 33 standard frequencies between 7.3728 MHz and 48 MHz (Refer to the Frequency list on page 13)
- Four frequency stability options:
   ±20 ppm, ±25 ppm, ±30 ppm, ±50 ppm
- Two operating temperatures:
   -40 to 105°C or -40 to 125°C
- Six supply voltage options: 1.8 V, 2.5 V, 2.8 V, 3.0 V, 3.3 V and 2.25 to 3.63 V continuous
- Output drive strength

For more information regarding SiTime's field programmable solutions, see Time Machine II and Field Programmable Oscillators.

SiT1618 is factory-programmed per customer ordering codes for volume delivery.




# **Dimensions and Patterns**

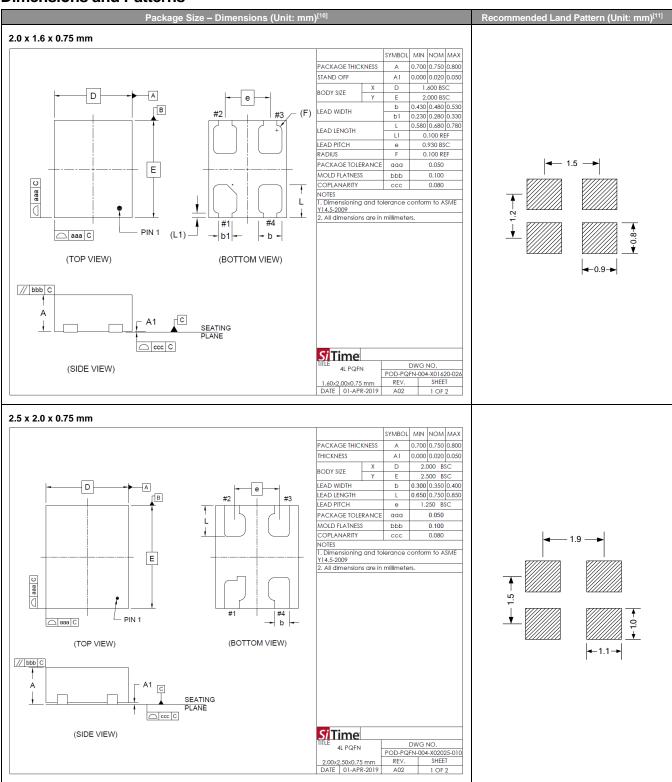




# **Dimensions and Patterns (continued)**

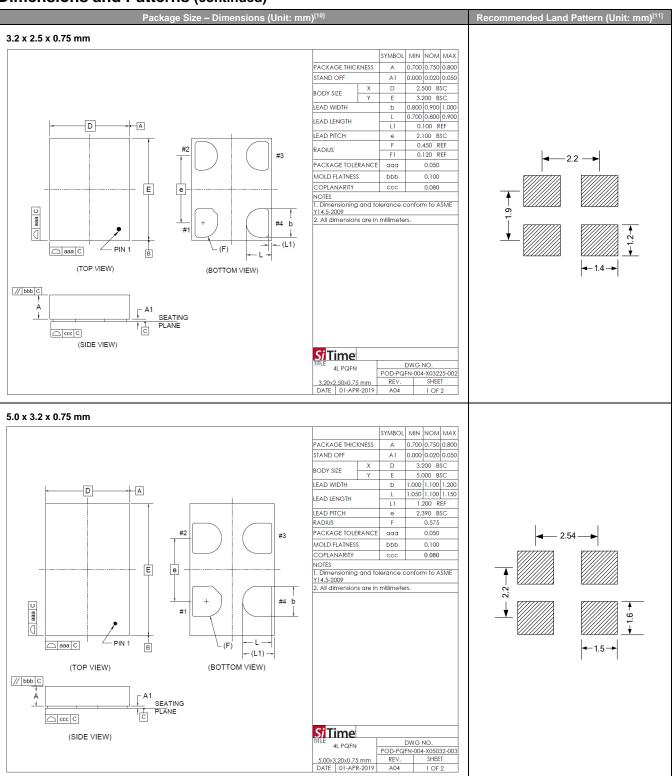



# **Dimensions and Patterns (continued)**

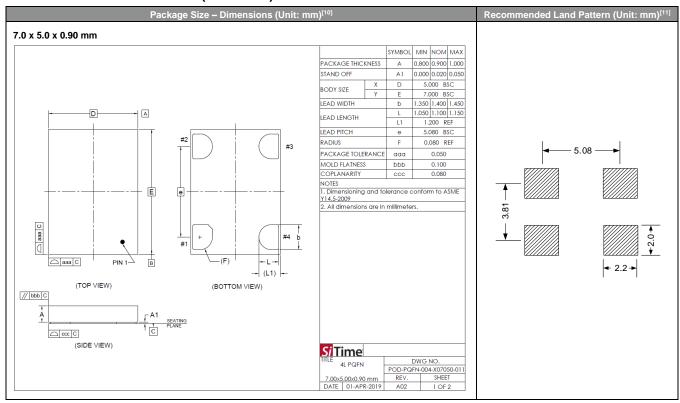


#### Notes:

- 10. Top marking: Y denotes manufacturing origin and XXXX denotes manufacturing lot number. The value of "Y" will depend on the assembly location of the device.
- 11. A capacitor of value 0.1  $\mu\text{F}$  or higher between Vdd and GND is required.



### **Ordering Information**

The Part No. Guide is for reference only. To customize and build an exact part number, use the SiTime Part Number Generator.

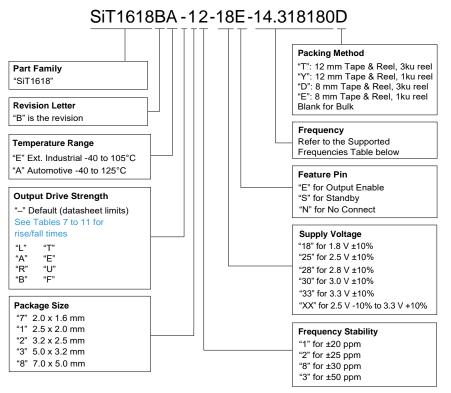

**Table 13. List of Supported Frequencies** 

7.3728 MHz	8 MHz	8.192 MHz	9.8304 MHz	9.84375 MHz	11.0592 MHz	12 MHz	12.288 MHz	13 MHz
13.225625 MHz	13.52127 MHz	14.31818 MHz	14.7456 MHz	15 MHz	16 MHz	16.384 MHz	18.432 MHz	19.6608 MHz
20 MHz	22.1184 MHz	24 MHz	24.56 MHz	24.576 MHz	25 MHz	26 MHz	27 MHz	29.4912 MHz
30 MHz	32 MHz	33 MHz	36 MHz	40 MHz	48 MHz			

Table 14. Ordering Codes for Supported Tape & Reel Packing Method

Device Size (mm x mm)	16 mm T&R (3ku)	16 mm T&R (1ku)	12 mm T&R (3ku)	12 mm T&R (1ku)	8 mm T&R (3ku)	8 mm T&R (1ku)
2.0 x 1.6	-	-	-	-	D	E
2.5 x 2.0	-	-	-	-	D	E
3.2 x 2.5	-	-	-	-	D	E
5.0 x 3.2	-	-	Т	Υ	-	-
7.0 x 5.0	Т	Y	-	-	_	_



#### **Table 15. Additional Information**

Document	Description	Download Link	
Time Machine II	MEMS oscillator programmer	http://www.sitime.com/support/time-machine-oscillator-programmer	
Field Programmable Oscillators	Devices that can be programmable in the field by Time Machine II	http://www.sitime.com/products/field-programmable-oscillators	
Manufacturing Notes	Tape & Reel dimension, reflow profile and other manufacturing related info	https://www.sitime.com/sites/default/files/gated/Manufacturing-Notes-for-SiTime-Products.pdf	
Qualification Reports	RoHS report, reliability reports, composition reports	http://www.sitime.com/support/quality-and-reliability	
Performance Reports	Additional performance data such as phase noise, current consumption and jitter for selected frequencies	http://www.sitime.com/support/performance-measurement-report	
Termination Techniques	Termination design recommendations	http://www.sitime.com/support/application-notes	
Layout Techniques	Layout recommendations	http://www.sitime.com/support/application-notes	

#### **Table 16. Revision History**

Revision	Release Date	Change Summary
1.0	14-Jul-2014	First Production Release
1.01	7-May-2015	Revised the Timing Diagrams and Performance Plots Revised 2016 package diagram
1.02	18-Jun-2015	Added 16 mm T&R information to Table 14 Revised 12 mm T&R information to Table 14
1.03	9-Mar-2021	Updated logo and company address, other page layout changes Updated Dimensions and Patterns drawings Updated hyperlinks, trademarks and changed rev table date format

SiTime Corporation, 5451 Patrick Henry Drive, Santa Clara, CA 95054, USA | Phone: +1-408-328-4400 | Fax: +1-408-328-4439

© SiTime Corporation 2014-2021. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

Disclaimer: SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any SiTime product and any product documentation. Products sold by SiTime are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. All sales are made conditioned upon compliance with the critical uses policy set forth below.

CRITICAL USE EXCLUSION POLICY

BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.



# **Supplemental Information**



#### **Best Reliability**

Silicon is inherently more reliable than quartz. Unlike quartz suppliers, SiTime has in-house MEMS and analog CMOS expertise, which allows SiTime to develop the most reliable products. Figure 1 shows a comparison with quartz technology.

#### Why is SiTime Best in Class:

- SiTime's MEMS resonators are vacuum sealed using an advanced EpiSeal® process, which eliminates foreign particles and improves long term aging and reliability
- World-class MEMS and CMOS design expertise

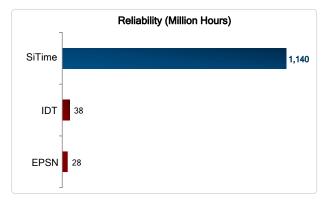


Figure 1. Reliability Comparison[1]

#### **Best Aging**

Unlike quartz, MEMS oscillators have excellent long term aging performance which is why every new SiTime product specifies 10-year aging. A comparison is shown in Figure 2.

#### Why is SiTime Best in Class:

- SiTime's MEMS resonators are vacuum sealed using an advanced EpiSeal® process, which eliminates foreign particles and improves long term aging and reliability
- Inherently better immunity of electrostatically driven MEMS resonator

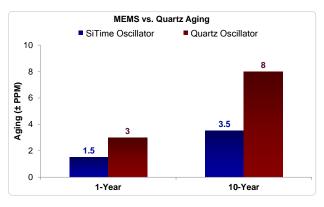


Figure 219. Aging Comparison<sup>[2]</sup>

#### **Best Electro Magnetic Susceptibility (EMS)**

SiTime's oscillators in plastic packages are up to 54 times more immune to external electromagnetic fields than quartz oscillators as shown in Figure 3.

#### Why is SiTime Best in Class:

- Internal differential architecture for best common mode noise rejection
- Electrostatically driven MEMS resonator is more immune to EMS

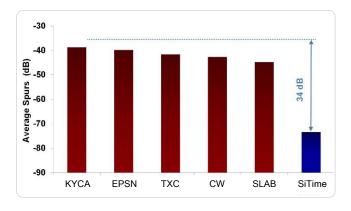


Figure 3. Electro Magnetic Susceptibility (EMS)[3]

#### **Best Power Supply Noise Rejection**

SiTime's MEMS oscillators are more resilient against noise on the power supply. A comparison is shown in Figure 4.

#### Why is SiTime Best in Class:

- On-chip regulators and internal differential architecture for common mode noise rejection
- MEMS resonator is paired with advanced analog CMOS IC

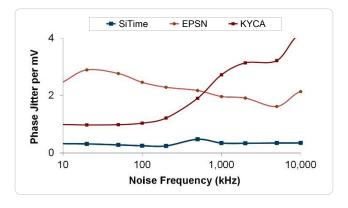


Figure 4. Power Supply Noise Rejection<sup>[4]</sup>



#### **Best Vibration Robustness**

High-vibration environments are all around us. All electronics, from handheld devices to enterprise servers and storage systems are subject to vibration. Figure 5 shows a comparison of vibration robustness.

#### Why is SiTime Best in Class:

- The moving mass of SiTime's MEMS resonators is up to 3000 times smaller than guartz
- Center-anchored MEMS resonator is the most robust design

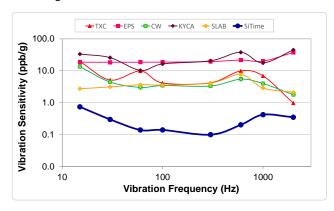


Figure 5. Vibration Robustness<sup>[5]</sup>

#### Figure labels:

- TXC = TXC
- Epson = EPSN
- Connor Winfield = CW
- Kyocera = KYCA
- SiLabs = SLAB
- SiTime = EpiSeal MEMS

#### **Best Shock Robustness**

SiTime's oscillators can withstand at least 50,000~g shock. They all maintain their electrical performance in operation during shock events. A comparison with quartz devices is shown in Figure 6.

#### Why is SiTime Best in Class:

- The moving mass of SiTime's MEMS resonators is up to 3000 times smaller than quartz
- Center-anchored MEMS resonator is the most robust design

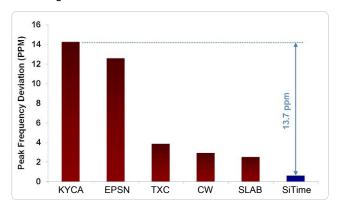


Figure 6. Shock Robustness<sup>[6]</sup>

# **Silicon MEMS Outperforms Quartz**



#### Notes:

- 1. Data source: Reliability documents of named companies.
- 2. Data source: SiTime and quartz oscillator devices datasheets.
- 3. Test conditions for Electro Magnetic Susceptibility (EMS):
  - According to IEC EN61000-4.3 (Electromagnetic compatibility standard)
  - Field strength: 3V/m
  - Radiated signal modulation: AM 1 kHz at 80% depth
  - Carrier frequency scan: 80 MHz 1 GHz in 1% steps
  - Antenna polarization: Vertical
  - DUT position: Center aligned to antenna

#### Devices used in this test:

Label	Manufacturer	Part Number	Technology
EpiSeal MEMS	SiTime	SiT9120AC-1D2-33E156.250000	MEMS + PLL
EPSN	Epson	EG-2102CA156.2500M-PHPAL3	Quartz, SAW
TXC	TXC	BB-156.250MBE-T	Quartz, 3 <sup>rd</sup> Overtone
CW	Conner Winfield	P123-156.25M	Quartz, 3 <sup>rd</sup> Overtone
KYCA	AVX Kyocera	KC7050T156.250P30E00	Quartz, SAW
SLAB	SiLab	590AB-BDG	Quartz, 3 <sup>rd</sup> Overtone + PLL

4. 50 mV pk-pk Sinusoidal voltage.

#### Devices used in this test:

Label	Manufacturer	Part Number	Technology
EpiSeal MEMS	SiTime	SiT8208AI-33-33E-25.000000	MEMS + PLL
NDK	NDK	NZ2523SB-25.6M	Quartz
KYCA	AVX Kyocera	KC2016B25M0C1GE00	Quartz
EPSN	Epson	SG-310SCF-25M0-MB3	Quartz

5. Devices used in this test:

same as EMS test stated in Note 3.

- 6. Test conditions for shock test:
  - MIL-STD-883F Method 2002
  - Condition A: half sine wave shock pulse, 500-g, 1ms
  - Continuous frequency measurement in 100 µs gate time for 10 seconds

#### Devices used in this test:

same as EMS test stated in Note 3.

7. Additional data, including setup and detailed results, is available upon request to qualified customer. Please contact productsupport@sitime.com.